

semaINFRA 19**Liquid trapping material for marking PVC floors****Detection with black light at 365 nm****Figure 1**

PVC flooring with catching material

Apply the layer evenly with a squeegee

Layer is colourless, odourless, slightly sticky glossy,

No hazardous substance

Figure 2

Thin layer

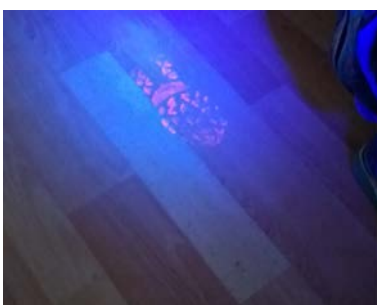
Red fluorescent under black light

**Figure 3**

Shoe sole contaminated with the catching material

Figure 4

Shoe profile imprint after contamination

**Figure 5**

Shoe print on PVC floor after 4 steps

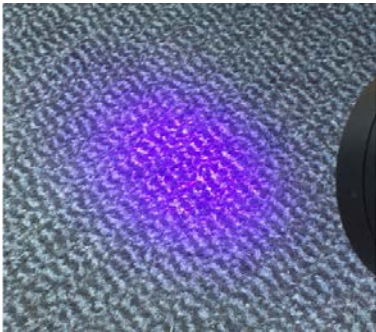


Figure 6

Imprint on carpet

Catch material is transferred to synthetic fibre

Figure 7

shoesole after approx. 10 steps on cement,
lawn and sand



Figure 8

Shoe soles after cleaning with detergent and
water, catch material still present.

Removal of the catch material from the floor:

Remove from the floor with cellulose paper / kitchen roll. Then
wipe the floor with an aqueous floor cleaning agent.